# École Doctorale des Sciences de l'Environnement d'Île-de-France Année Universitaire 2010-2011

# Modélisation Numérique de l'Écoulement Atmosphérique et Assimilation d'Observations

Olivier Talagrand
Cours 7
16 Juin 2011

Observation vector at time k

$$y_k = H_k x_k + \varepsilon_k$$
  $k = 0, ..., K$   $E(\varepsilon_k) = 0$  ;  $E(\varepsilon_k \varepsilon_j^{\mathrm{T}}) = R_k \delta_{kj}$   $H_k \text{ linear}$ 

Evolution equation

$$x_{k+1} = M_k x_k + \eta_k$$
 
$$k = 0, ..., K-1$$
 
$$E(\eta_k) = 0 \quad ; \quad E(\eta_k \eta_j^{\mathrm{T}}) = Q_k \, \delta_{kj}$$
 
$$M_k \, \text{linear}$$

•  $E(\eta_k \varepsilon_i^T) = 0$  (errors uncorrelated in time)

At time k, background  $x_k^b$  and associated error covariance matrix  $P_k^b$  known

### Analysis step

$$x^{a}_{k} = x^{b}_{k} + P^{b}_{k} H_{k}^{T} [H_{k} P^{b}_{k} H_{k}^{T} + R_{k}]^{-1} (y_{k} - H_{k} x^{b}_{k})$$

$$P^{a}_{k} = P^{b}_{k} - P^{b}_{k} H_{k}^{T} [H_{k} P^{b}_{k} H_{k}^{T} + R_{k}]^{-1} H_{k} P^{b}_{k}$$

### Forecast step

$$x^{b}_{k+1} = M_{k} x^{a}_{k} P^{b}_{k+1} = M_{k} P^{a}_{k} M_{k}^{T} + Q_{k}$$

Kalman filter (KF, Kalman, 1960)

Must be started from some initial estimate  $(x_0^b, P_0^b)$ 

### **Nonlinearities?**

Model is usually nonlinear, and observation operators (satellite observations) tend more and more to be nonlinear.

Analysis step

$$x^{a}_{k} = x^{b}_{k} + P^{b}_{k} H_{k}^{'T} [H_{k}^{'} P^{b}_{k} H_{k}^{'T} + R_{k}]^{-1} [y_{k} - \frac{H_{k}(x^{b}_{k})}{H_{k}^{'T}}]$$

$$P^{a}_{k} = P^{b}_{k} - P^{b}_{k} H_{k}^{'T} [H_{k}^{'} P^{b}_{k} H_{k}^{'T} + R_{k}]^{-1} H_{k}^{'} P^{b}_{k}$$

Forecast step

$$x_{k+1}^{b} = M_{k}(x_{k}^{a})$$
  
 $P_{k+1}^{b} = M_{k}' P_{k}^{a} M_{k}'^{T} + Q_{k}$ 


Extended Kalman Filter (EKF, heuristic!)

Costliest part of computation


$$P^b_{k+1} = M_k P^a_k M_k^{\mathrm{T}} + Q_k$$

Multiplication by  $M_k$  = one integration of the model between times k and k+1. Computation of  $M_k P_k^a M_k^T \approx 2n$  integrations of the model

Need for determining the temporal evolution of the uncertainty on the state of the system is the major difficulty in assimilation of meteorological and oceanographical observations

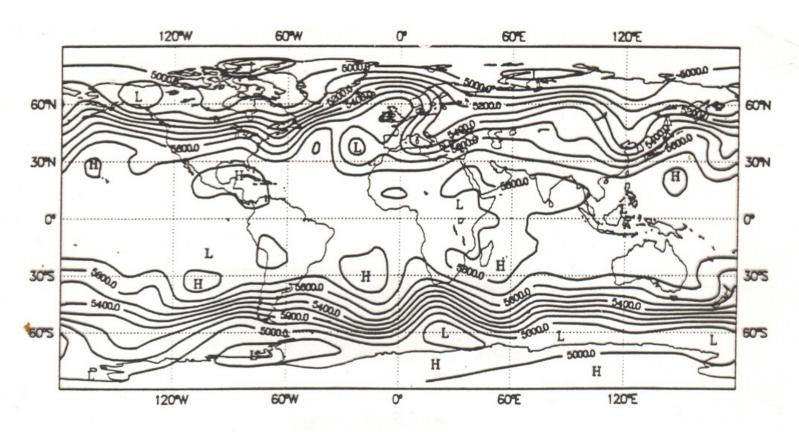

Analysis of 500-hPa geopotential for 1 December 1989,00:00 UTC (ECMWF, spectral truncation T21, unit *m*. After F. Bouttier)

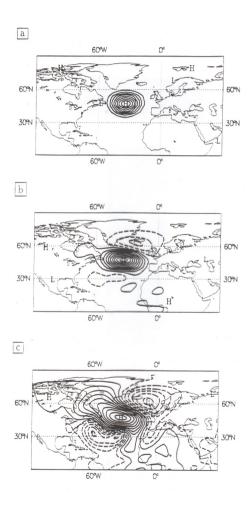

Temporal evolution of the 500-hPa geopotential autocorrelation with respect to point located at 45N, 35W. From top to bottom: initial time, 6- and 24-hour range. Contour interval 0.1. After F. Bouttier.

### Two solutions:

- Low-rank filters (Heemink, Pham, ...)

  Reduced Rank Square Root Filters, Singular Evolutive Extended Kalman Filter, ....
- Ensemble filters (Evensen, Anderson, ...)

Uncertainty is represented, not by a covariance matrix, but by an ensemble of point estimates in state space which are meant to sample the conditional probability distribution for the state of the system (dimension  $N \approx O(10\text{-}100)$ ).

Ensemble is evolved in time through the full model, which eliminates any need for linear hypothesis as to the temporal evolution.

How to update predicted ensemble with new observations?

Predicted ensemble at time  $t: \{x^b_n\}$ , n = 1, ..., NObservation vector at same time :  $y = Hx + \varepsilon$ 

### • Gaussian approach

Produce sample of probability distribution for real observed quantity Hx

$$y_n = y - \varepsilon_n$$

where  $\varepsilon_n$  is distributed according to probability distribution for observation error  $\varepsilon$  .

Then use Kalman formula to produce sample of 'analysed' states

$$x_{n}^{a} = x_{n}^{b} + P^{b} H^{T} [HP^{b}H^{T} + R]^{-1} (y_{n} - Hx_{n}^{b}), \qquad n = 1, ..., N$$
 (2)

where  $P^b$  is covariance matrix of predicted ensemble  $\{x^b_n\}$ .

*Remark*. If  $P^b$  was exact covariance matrix of background error, (2) would achieve Bayesian estimation, in the sense that  $\{x_n^a\}$  would be a sample of conditional probability distribution for x, given all data up to time t.

# Called *Ensemble Kalman Filter* (EnKF)

### But problems

- Collapse of ensemble for small ensemble size (less than a few hundred). Empirical 'covariance inflation'
- Spurious correlations appear at large geographical distances. Empirical 'localization'.


In formula

$$x_n^a = x_n^b + P^b H^T [HP^b H^T + R]^{-1} (y_n - Hx_n^b), \qquad n = 1, ..., N$$

 $P^b$ , which is covariance matrix of an N-size ensemble, has rank N-1 at most. This means that corrections made on ensemble elements are contained in a subspace with dimension N-1. Obviously very restrictive if  $N \ll p$ ,  $N \ll n$ .

# Month-long Performance of EnKF vs. 3Dvar with WRF

# — EnKF — 3DVar (prior, solid; posterior, dotted)

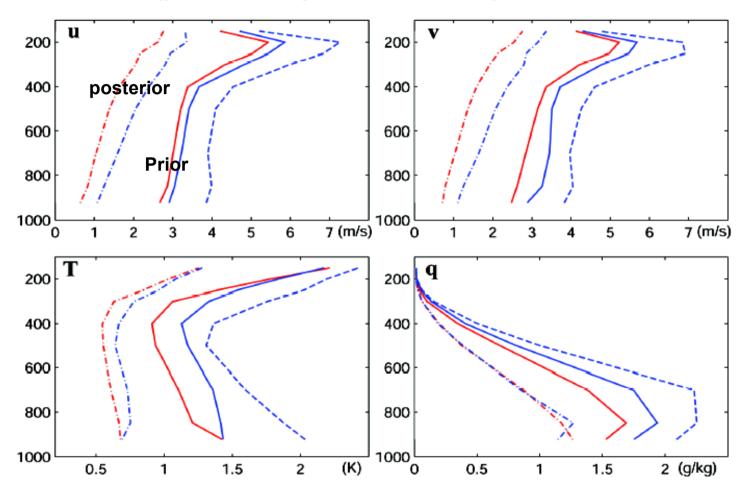

Better performance of EnKF than 3DVar also seen in both 12-h forecast and posterior analysis in terms of root-mean square difference averaged over the entire month

Situation still not entirely clear.

Houtekamer and Mitchell (1998) use two ensembles, the elements of each of which are updated with covariance matrix of other ensemble.

Local Ensemble Transform Kalman Filter (LETKF) defined by Kalnay and colleagues. Correction is performed locally in space on the basis of neighbouring observations.

In any case, optimality always requires errors to be independent in time. In order to relax that constraint, it is necessarily to augment the state vector in the temporal dimension.

Variational approach can easily be extended to time dimension.

Suppose for instance available data consist of

- Background estimate at time 0

$$x_0^b = x_0 + \zeta_0$$

$$x_0^b = x_0 + \zeta_0^b$$
  $E(\zeta_0^b \zeta_0^{bT}) = P_0^b$ 

- Observations at times k = 0, ..., K

$$y_k = H_k x_k + \varepsilon_k$$

$$y_k = H_k x_k + \varepsilon_k$$
  $E(\varepsilon_k \varepsilon_i^{\mathrm{T}}) = R_k$ 

- Model (supposed for the time being to be exact)

$$x_{k+1} = M_k x_k$$

$$k=0,\,\ldots,\,K\text{-}1$$

Errors assumed to be unbiased and uncorrelated in time,  $H_k$  and  $M_k$  linear

Then objective function

$$\xi_0 \in \mathcal{S} \rightarrow$$

$$\mathcal{J}(\xi_0) = (1/2) (x_0^b - \xi_0)^{\mathrm{T}} [P_0^b]^{-1} (x_0^b - \xi_0) + (1/2) \Sigma_k [y_k - H_k \xi_k]^{\mathrm{T}} R_k^{-1} [y_k - H_k \xi_k]$$

subject to 
$$\xi_{k+1} = M_k \xi_k$$
,  $k = 0, ..., K-1$ 

$$k = 0, ..., K-1$$

$$\mathcal{J}(\xi_0) = (1/2) (x_0^b - \xi_0)^{\mathrm{T}} [P_0^b]^{-1} (x_0^b - \xi_0) + (1/2) \sum_k [y_k - H_k \xi_k]^{\mathrm{T}} R_k^{-1} [y_k - H_k \xi_k]$$

Background is not necessary, if observations are in sufficient number to overdetermine the problem. Nor is strict linearity.

How to minimize objective function with respect to initial state  $u = \xi_0$  (u is called the *control variable* of the problem)?

Use iterative minimization algorithm, each step of which requires the explicit knowledge of the local gradient  $\nabla_u \mathcal{J} = (\partial \mathcal{J}/\partial u_i)$  of  $\mathcal{J}$  with respect to u.

How to numerically compute the gradient  $\nabla_{\mu} \mathcal{J}$ ?

Direct perturbation, in order to obtain partial derivatives  $\partial \mathcal{J}/\partial u_i$  by finite differences? That would require as many explicit computations of the objective function  $\mathcal{J}$  as there are components in u. Practically impossible.

Gradient computed by adjoint method.

# **Adjoint Method**

Input vector  $\mathbf{u} = (u_i)$ , dim $\mathbf{u} = n$ 

Numerical process, implemented on computer (e. g. integration of numerical model)

$$u \rightarrow v = G(u)$$

 $\mathbf{v} = (v_i)$  is output vector,  $\dim \mathbf{v} = \mathbf{m}$ 

Perturbation  $\delta u = (\delta u_i)$  of input. Resulting first-order perturbation on v

$$\delta v_j = \Sigma_i \left( \partial v_j / \partial u_i \right) \, \delta u_i$$

or, in matrix form

$$\delta v = G' \delta u$$

where  $G' = (\partial v_j / \partial u_i)$  is local matrix of partial derivatives, or jacobian matrix, of G.

# **Adjoint Method (continued 1)**

$$\delta v = G' \delta u \tag{D}$$

Scalar function of output

$$\mathcal{J}(v) = \mathcal{J}[G(u)]$$

Gradient  $\nabla_{u} \mathcal{J}$  of  $\mathcal{J}$  with respect to input u?

'Chain rule'

$$\partial \mathcal{J}/\partial u_i = \sum_j \partial \mathcal{J}/\partial v_j (\partial v_j/\partial u_i)$$

or

$$\nabla_{\boldsymbol{u}} \mathcal{J} = \boldsymbol{G}^{\mathsf{T}} \nabla_{\boldsymbol{v}} \mathcal{J} \tag{A}$$

### **Adjoint Method (continued 2)**

G is the composition of a number of successive steps

$$G = G_N \circ \ldots \circ G_2 \circ G_1$$

'Chain rule'

$$G' = G_N' \dots G_2' G_1'$$

Transpose

$$\boldsymbol{G}^{T} = \boldsymbol{G}_{1}^{T} \boldsymbol{G}_{2}^{T} \dots \boldsymbol{G}_{N}^{T}$$

Transpose, or *adjoint*, computations are performed in reversed order of direct computations.

If G is nonlinear, local jacobian G' depends on local value of input u. Any quantity which is an argument of a nonlinear operation in the direct computation will be used again in the adjoint computation. It must be kept in memory from the direct computation (or else be recomputed again in the course of the adjoint computation).

If everything is kept in memory, total operation count of adjoint computation is at most 4 times operation count of direct computation (in practice about 2).

## **Adjoint Approach**

$$\mathcal{J}(\xi_0) = (1/2) (x_0^b - \xi_0)^{\mathrm{T}} [P_0^b]^{-1} (x_0^b - \xi_0) + (1/2) \sum_k [y_k - H_k \xi_k]^{\mathrm{T}} R_k^{-1} [y_k - H_k \xi_k]$$
subject to  $\xi_{k+1} = M_k \xi_k$ ,  $k = 0, ..., K-1$ 

Control variable  $\xi_0 = \mathbf{u}$ 

Adjoint equation

$$\lambda_{K} = H_{K}^{T} R_{K}^{-1} [H_{K} \xi_{K} - y_{K}]$$

$$\lambda_{k} = M_{k}^{T} \lambda_{k+1} + H_{k}^{T} R_{k}^{-1} [H_{k} \xi_{k} - y_{k}]$$

$$\lambda_{0} = M_{0}^{T} \lambda_{1} + H_{0}^{T} R_{0}^{-1} [H_{0} \xi_{0} - y_{0}] + [P_{0}^{b}]^{-1} (\xi_{0} - x_{0}^{b})$$

$$k = K-1, \dots, 1$$

$$\nabla_u \mathcal{J} = \lambda_0$$

Result of direct integration  $(\xi_k)$ , which appears in quadratic terms in expression of objective function, must be kept in memory from direct integration.

## **Adjoint Approach (continued 2)**

#### **Nonlinearities?**

$$\mathcal{J}(\xi_0) = (1/2) (x_0^b - \xi_0)^T [P_0^b]^{-1} (x_0^b - \xi_0) + (1/2) \sum_k [y_k - H_k(\xi_k)]^T R_k^{-1} [y_k - H_k(\xi_k)]$$
subject to  $\xi_{k+1} = M_k(\xi_k)$ ,  $k = 0, ..., K-1$ 

Control variable  $\xi_0 = \mathbf{u}$ 

$$\xi_0 = u$$

Adjoint equation

$$\lambda_{K} = H_{K}^{'T} R_{K}^{-1} [H_{K}(\xi_{K}) - y_{K}]$$

$$\lambda_{k} = M_{k}^{'T} \lambda_{k+1} + H_{k}^{'T} R_{k}^{-1} [H_{k}(\xi_{k}) - y_{k}]$$

$$\lambda_{0} = M_{0}^{'T} \lambda_{1}^{T} + H_{0}^{'T} R_{0}^{-1} [H_{0}(\xi_{0}) - y_{0}] + [P_{0}^{b}]^{-1} (\xi_{0} - x_{0}^{b})$$

$$k = K-1, ..., 1$$

$$\nabla_{u} \mathcal{J} = \lambda_{0}$$

Not heuristic (it gives the exact gradient  $\nabla_{u} \mathcal{J}$ ), and really used as described here.

### How to write the adjoint of a code?

Operation  $a = b \times c$ Input *b*, *c* Output a but also b, cFor clarity, we write a = b x cb' = bc' = c $\partial J/\partial a$ ,  $\partial J/\partial b'$ ,  $\partial J/\partial c'$  available. We want to determine  $\partial J/\partial b$ ,  $\partial J/\partial c$ Chain rule  $\partial J/\partial b = (\partial J/\partial a)(\partial a/\partial b) + (\partial J/\partial b')(\partial b'/\partial b) + (\partial J/\partial c')(\partial c'/\partial b)$ 0  $\partial J/\partial b = (\partial J/\partial a) c + \partial J/\partial b'$ Similarly  $\partial J/\partial c = (\partial J/\partial a) b + \partial J/\partial c'$